


Lavička BOROLA

LBL5



The picture is only illustrative, it may not exactly match the product described.

<p>Product description</p>	<p>Bench with aluminium alloy sides. 10 wooden laths of rectangular cross-section and 6 laths of atypical arched cross-section with radius R 80 mm are carried by bench sides. They are attached to the sides with stainless steel screws. The seat and backrest laths are interconnected by a reinforcing steel belt. Two steel armrests dividing the bench seat surface into thirds are fixed over wooden slats.</p>
<p>Material</p>	<p>Construction: aluminium alloy, sheet metal blast 4 mm thick                  Solid wood: spruce, oak, wood pine ThermoWood®, tropical wood, acacia</p>
<p>Surface treatment</p>	<p>Natural aluminium shade optionally with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).                  Other RAL shades according to RAL sampler on request only.                  Spruce – two-layer impregnation and lacquer mixed with water with beeswax                  Tropical wood – treated with teak oil                  Oak – treated with impregnation and a glaze with biocidal effect                  Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection                  Acacia – treated with teak oil</p>
<p>Dimensions</p>	<p>1800×734×784 mm</p>
<p>Anchoring</p>	<p>Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.                  A detailed drawing is available for download on the website for each particular product.</p>

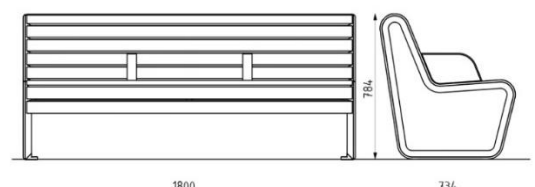

[DOWNLOAD PDF SAMPLER >](#)