



Semi-Automatic Telescopic with key Ø220 x 500m

H2208

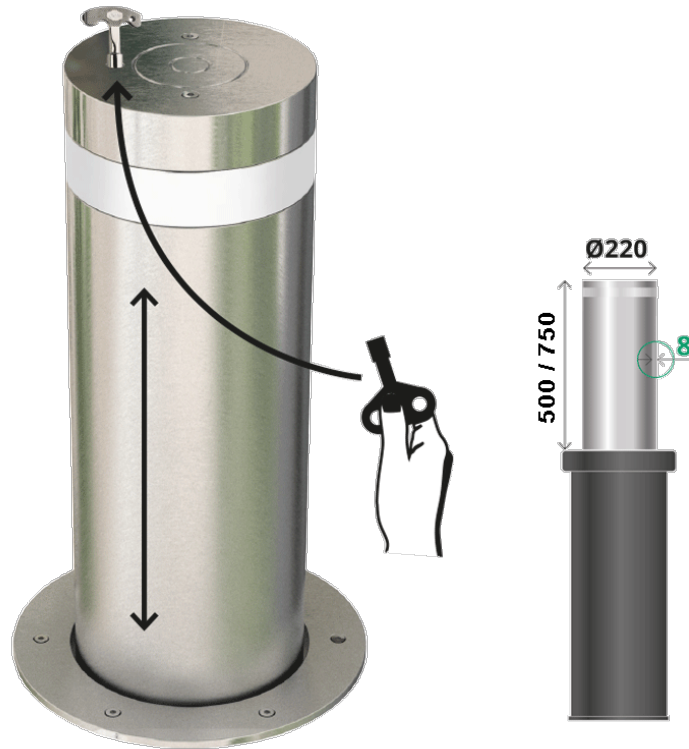


Semi-Automatic Telescopic with key and LED Ø220 x 500

H220L8





Semi-Automatic Telescopic with key Ø114 x 500m

H1144



Bollard designed for controlling the access to the public road, communities of neighbours, companies, etc.
Automatic rising and manual lowering. Automatic locking in both positions, unlocking by means of a DIN3223 triangular key.



Ref.	Ø A	B	C	D	E	
H2208	Ø220	670	500	274	340	8
H2208/75	Ø220	670	750	274	340	8
H2204	Ø220	670	500	274	340	4

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [Mounting instructions](#) | [BIM](#) | [HD image](#)

Characteristics:

- Material and finishes: Stainless steel/ Satin
- Rising system: Gas spring
- Rising strength: 700 Nw
- Reflective band: Yes, grey level II
- Key: Yes (triangular 10 mm) - possibility of providing a different kind of key
- Automatic locking: Yes, in both positions
- Impact resistance: 125.000 Jules
- Cycles: More than 500,000

