


AILES Seat

LAI2



The picture is only illustrative, it may not exactly match the product described.

Product description	Steel weldment. The construction consists of two interconnected sheet metal parts forming the seat and a rear anchor plate with three holes for anchoring to the wall. The construction is made of sheet metal th. 4 mm. The seat is made of four wooden laths of dimensions 48x32 mm and length 278 mm attached to the metal constructions with stainless steel screws.
Material	Construction: steel grade 11 Solid wood: wood pine ThermoWood®, tropical wood
Surface treatment	Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium). Other RAL shades according to RAL sampler on request only. Tropical wood – treated with teak oil Thermally modified wood pine ThermoWood® – penetration coating for wood with UV protection
Dimensions	400x460x106 mm
Anchoring	Anchoring is done with three stainless steel threaded rods M10 of length min. 100 mm and three nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance. A detailed drawing is available for download on the website for each particular product.

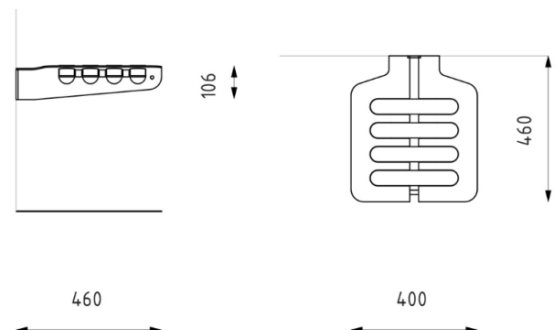

[DOWNLOAD PDF SAMPLER >](#)